






## LOCINOX




## LOCINOX USA




CONE85-DC




CONE55-DC




HEPTA75-DC




CUBE75-DC




CUBE55-DC



ARCO75-DC



ARCO55-DC

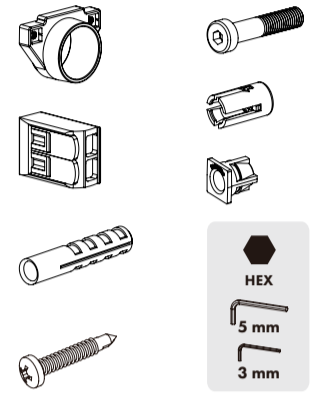


HEX


5 mm

3 mm


CONE85-DC

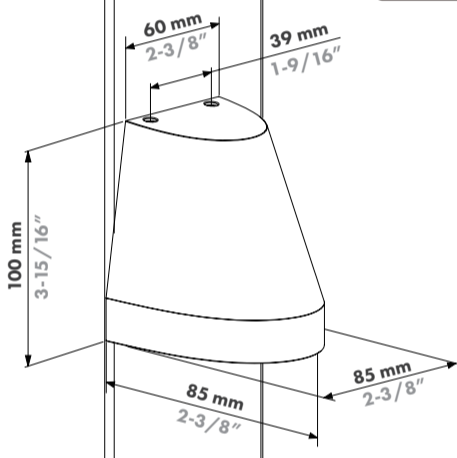


CONE55-DC

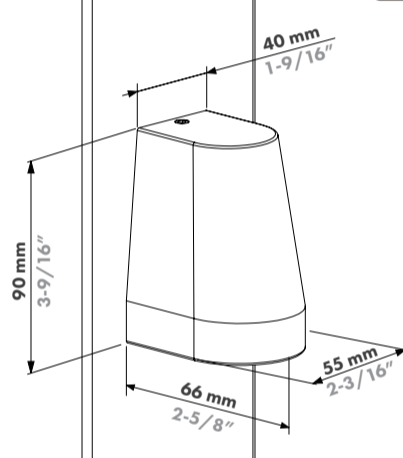


HEPTA75-DC

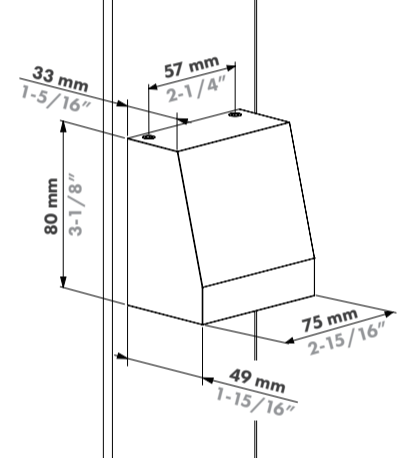


CUBE55-DC

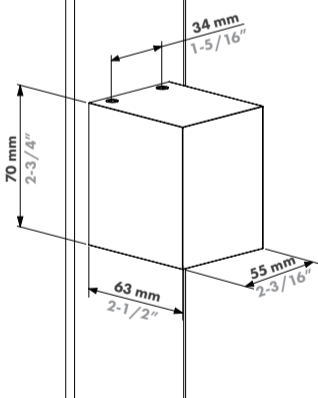











CUBE75-DC






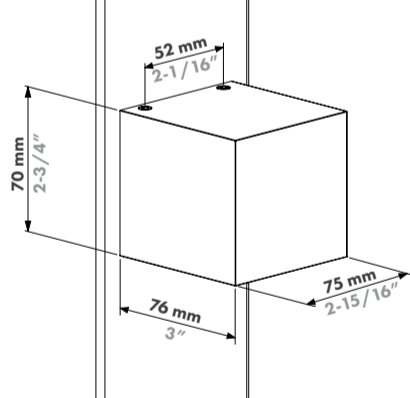


ARCO55-DC

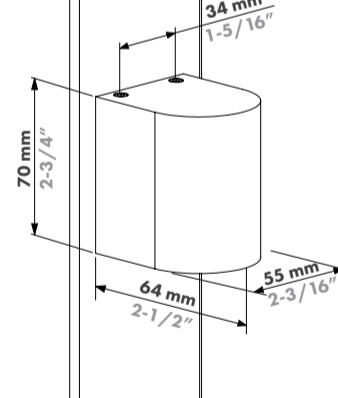

ARCO75-DC

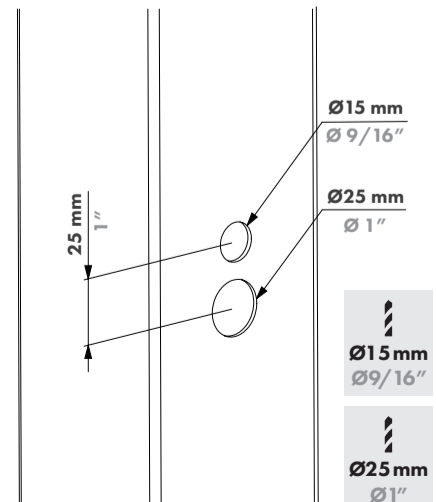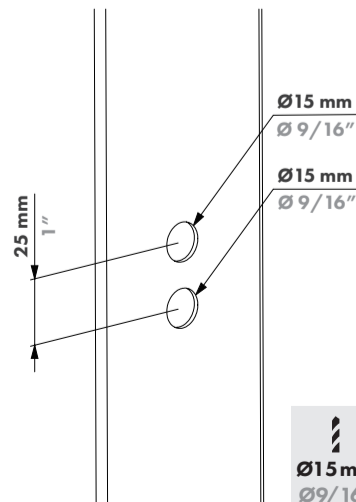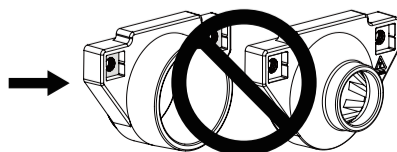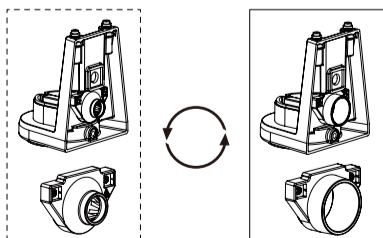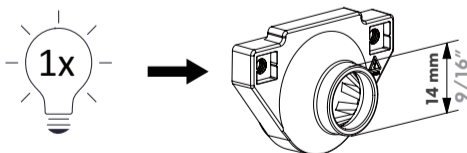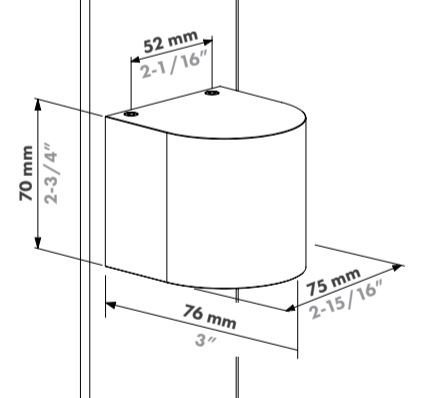


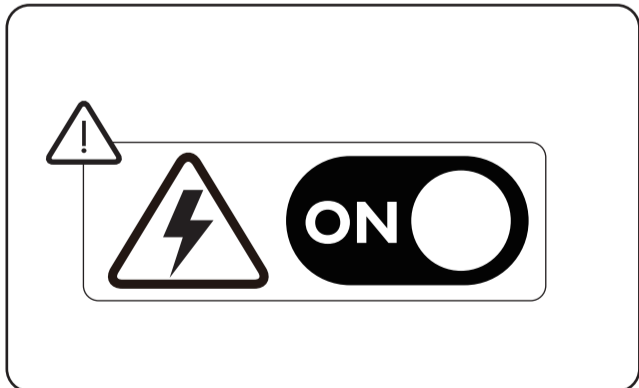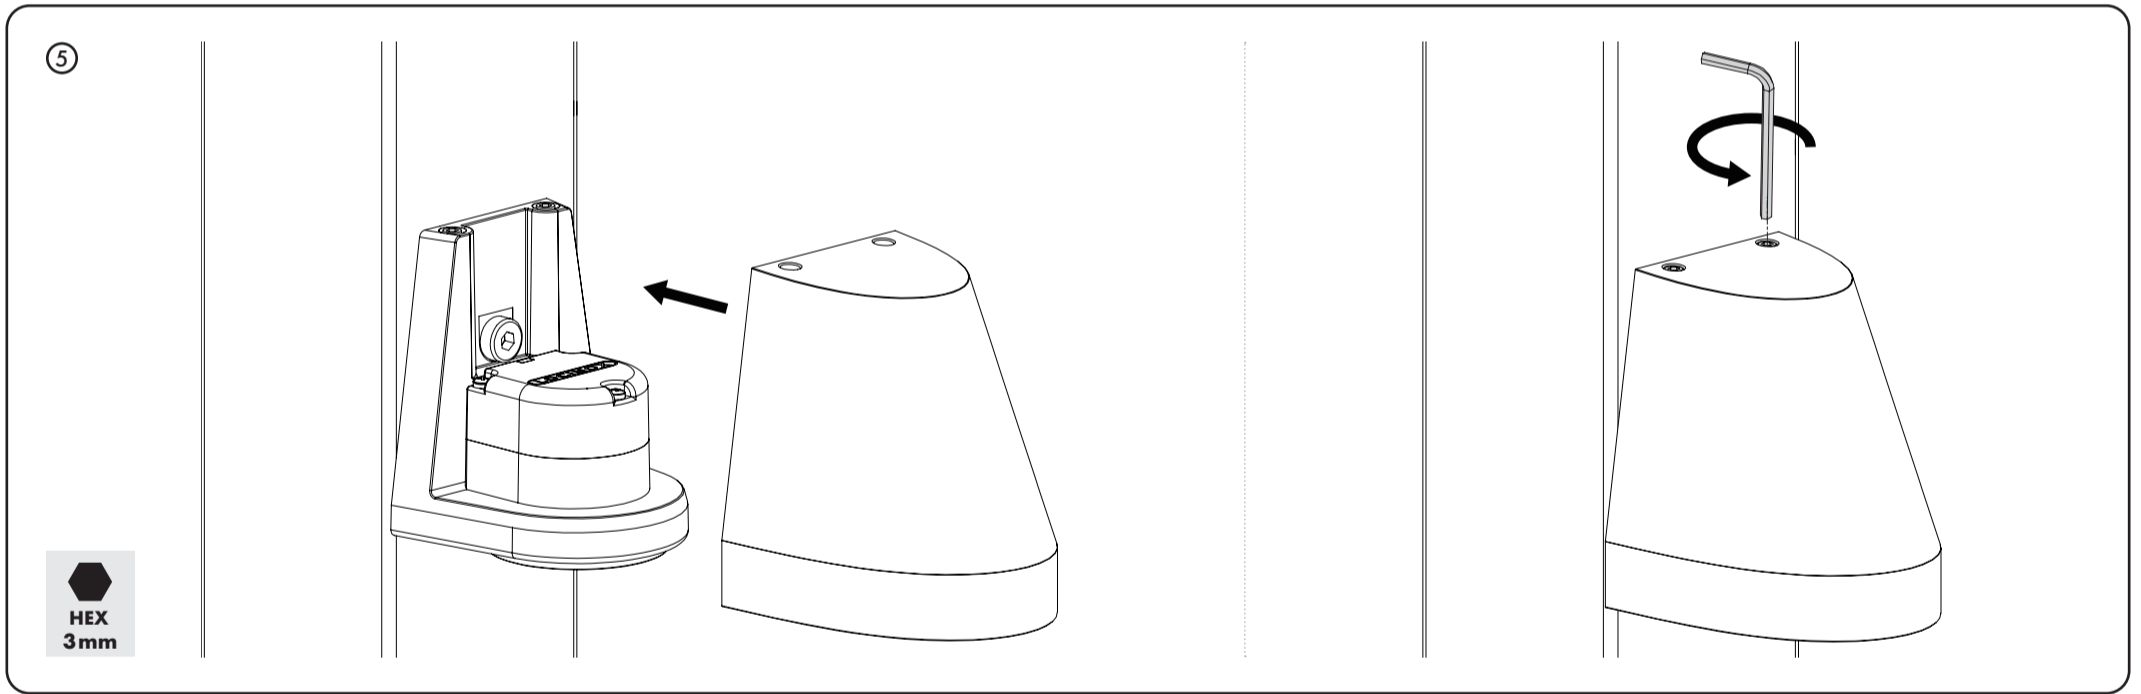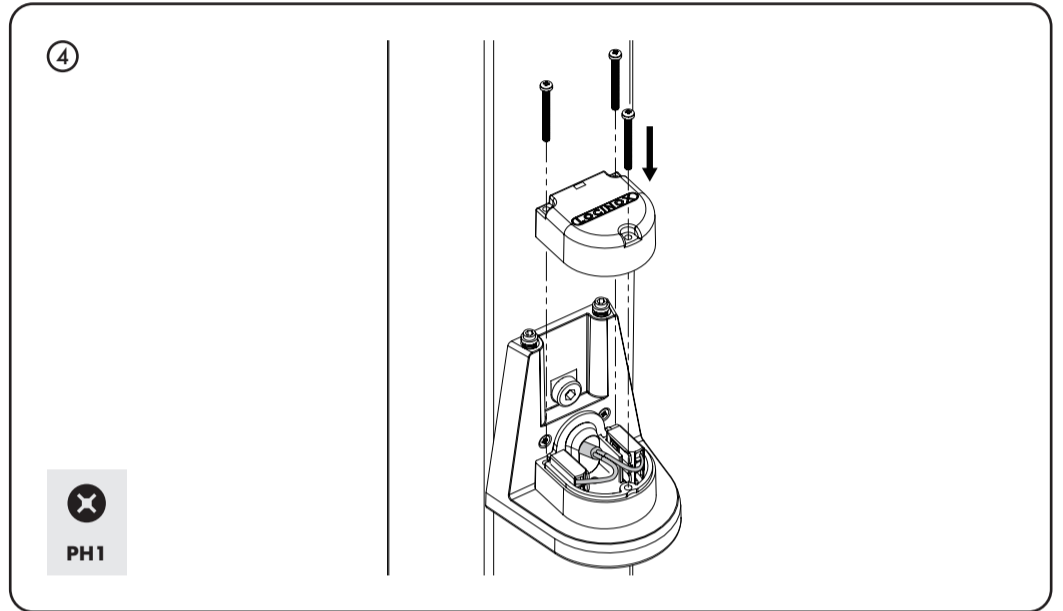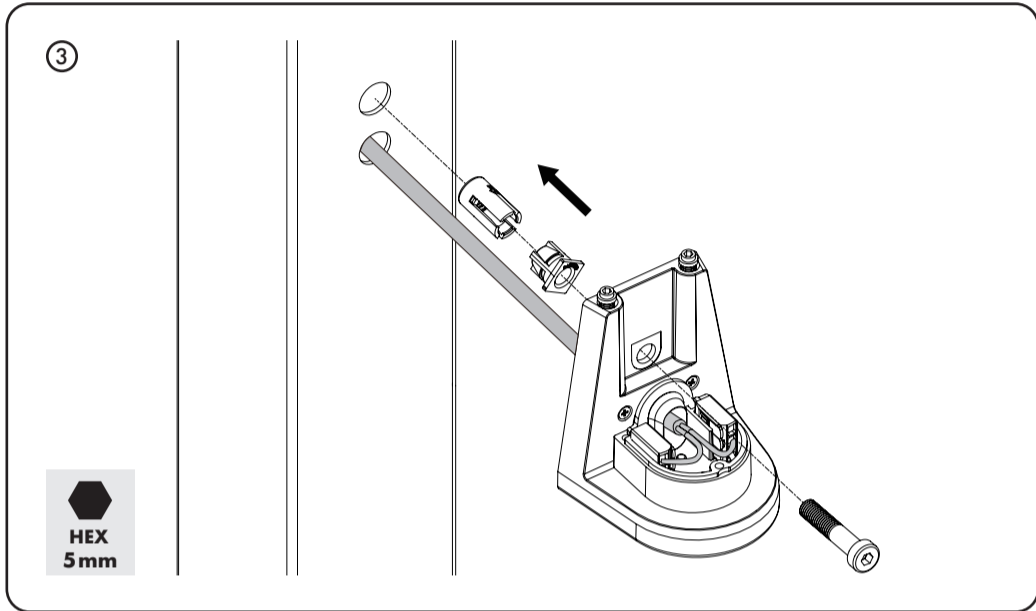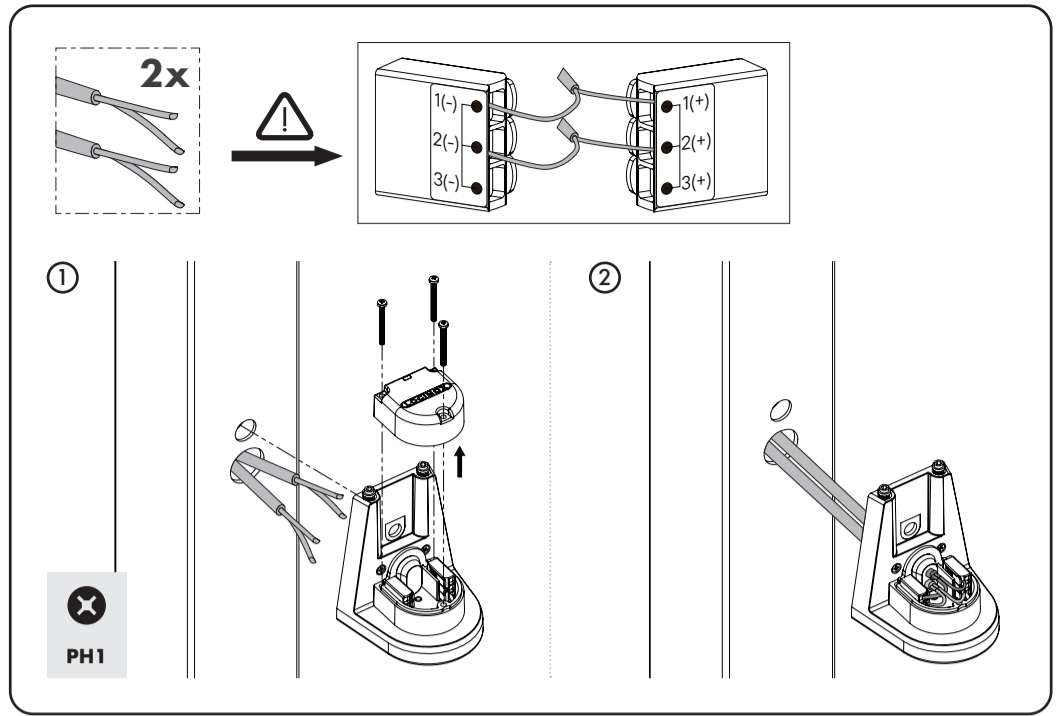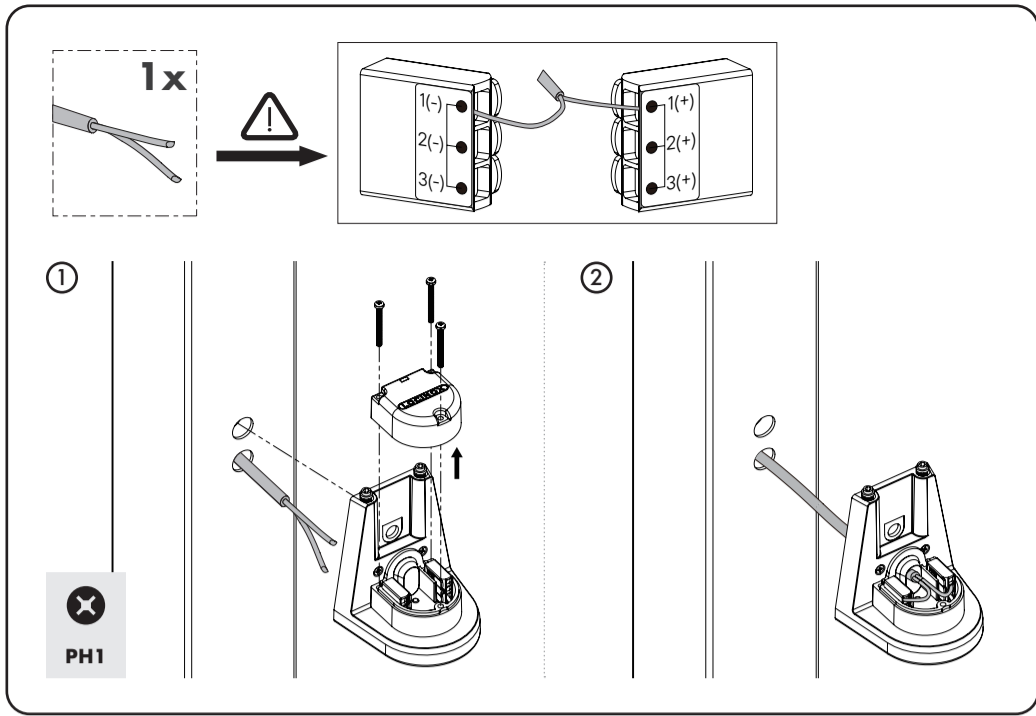

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Input voltage: 12-24V  
 Input current: 200mA  
 Power: Max.3W  
 Light output: 270 LUMEN

Safety class III  
 Protection class IP 65  
 Impact strength IK 06  
 Colour temperature: 2700K  
 Maximum number of interconnected luminaires: 12pcs

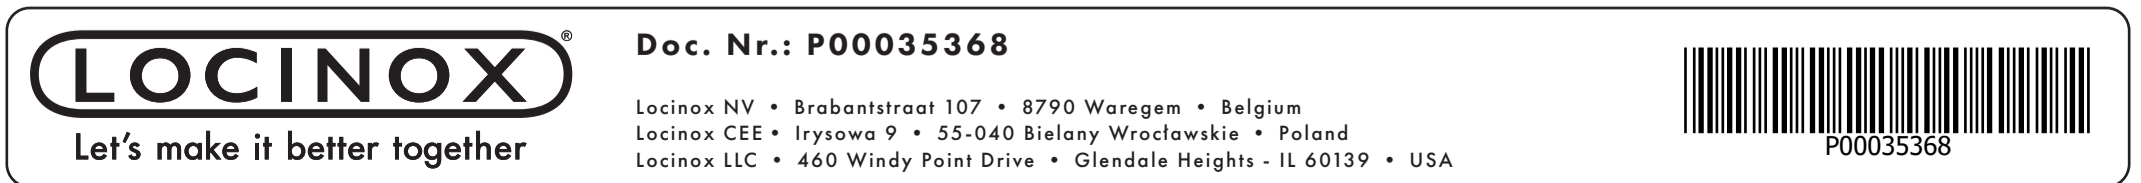



## ? LOCINOX



LIVE CHAT  
www.locinox.com

BE-HQ: +32 56 77 27 66  
PL-CEE: +48 717 58 21 00

help@locinox.com


## ? LOCINOX USA




LIVE CHAT  
www.locinoxusa.com

877-LOCINOX


helpusa@locinox.com




CONE85-230V




CONE55-230V




HEPTA75-230V




CUBE75-230V




CUBE55-230V



ARCO75-230V



ARCO55-230V

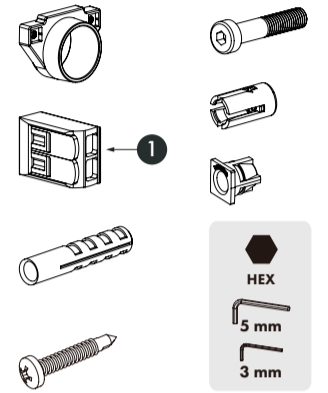


HEX


5 mm

3 mm


CONE85-230V

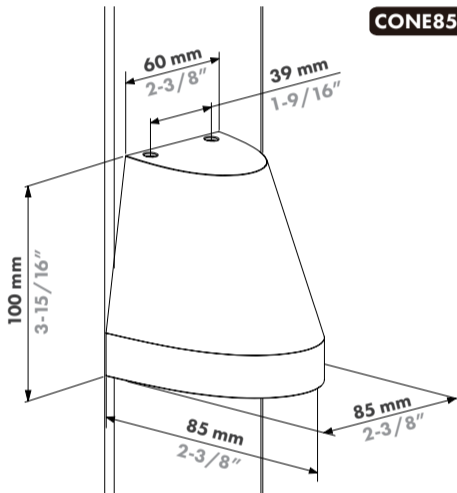


CONE55-230V

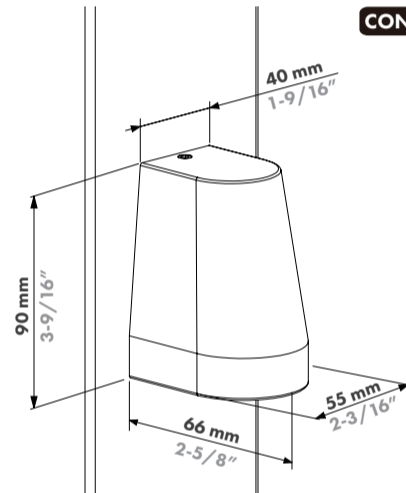


HEPTA75-230V

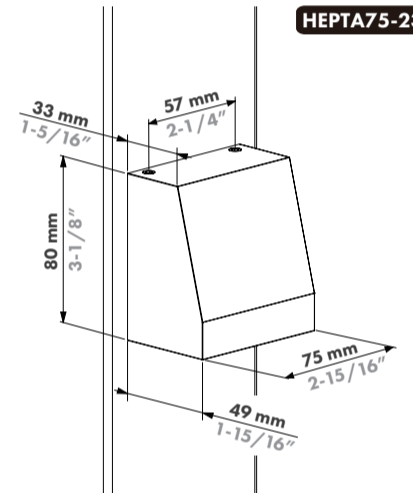


CUBE55-230V

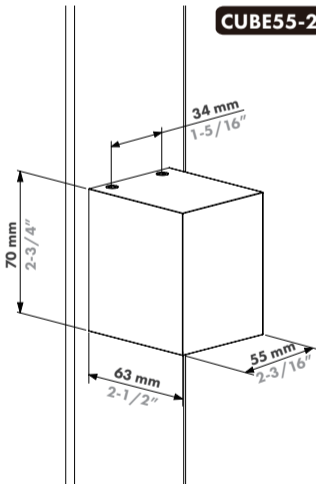







CUBE75-230V






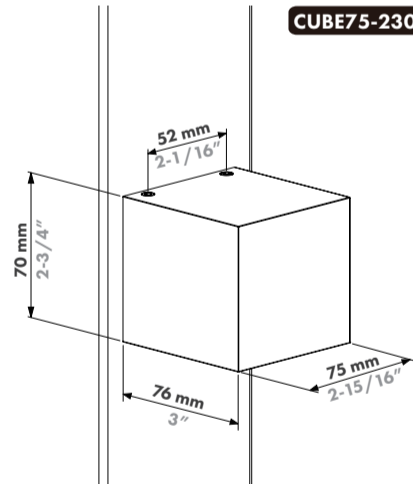


ARCO55-230V

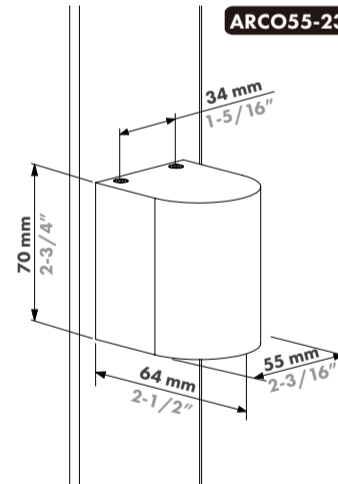

ARCO75-230V

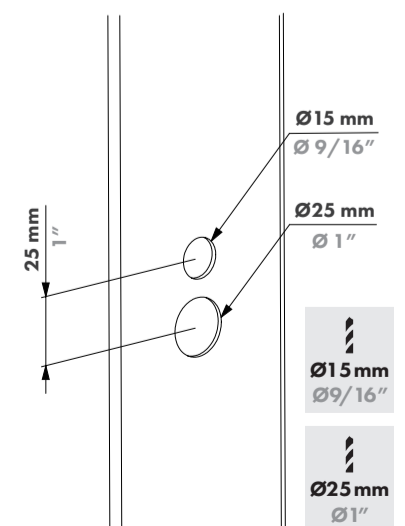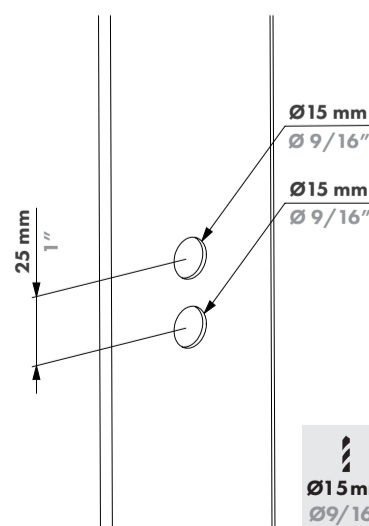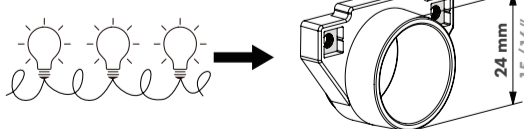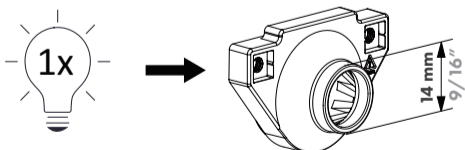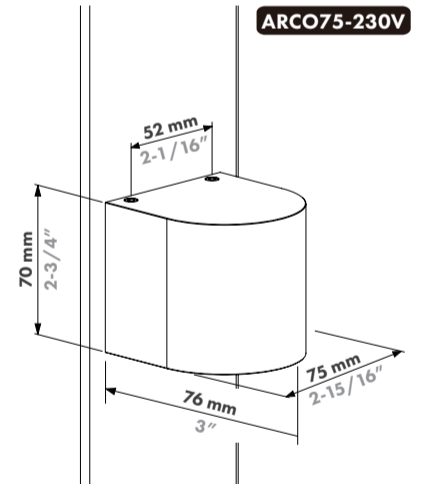

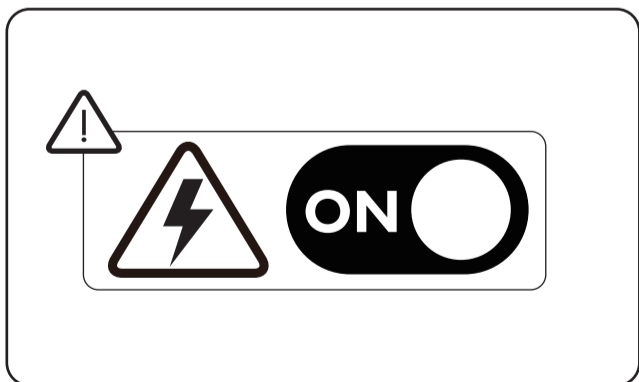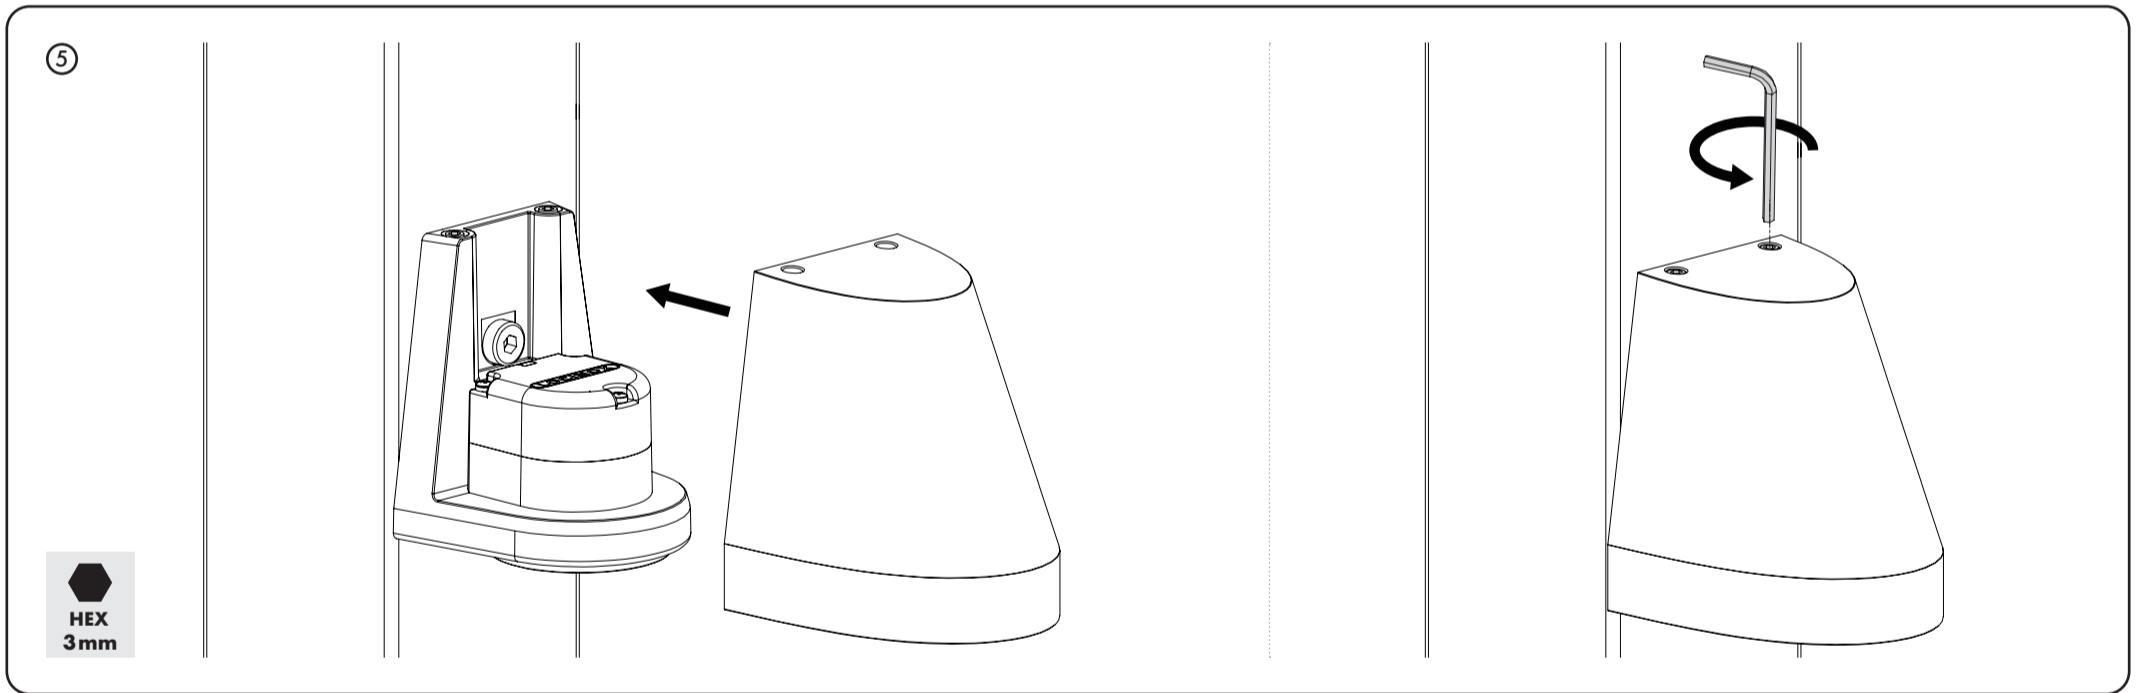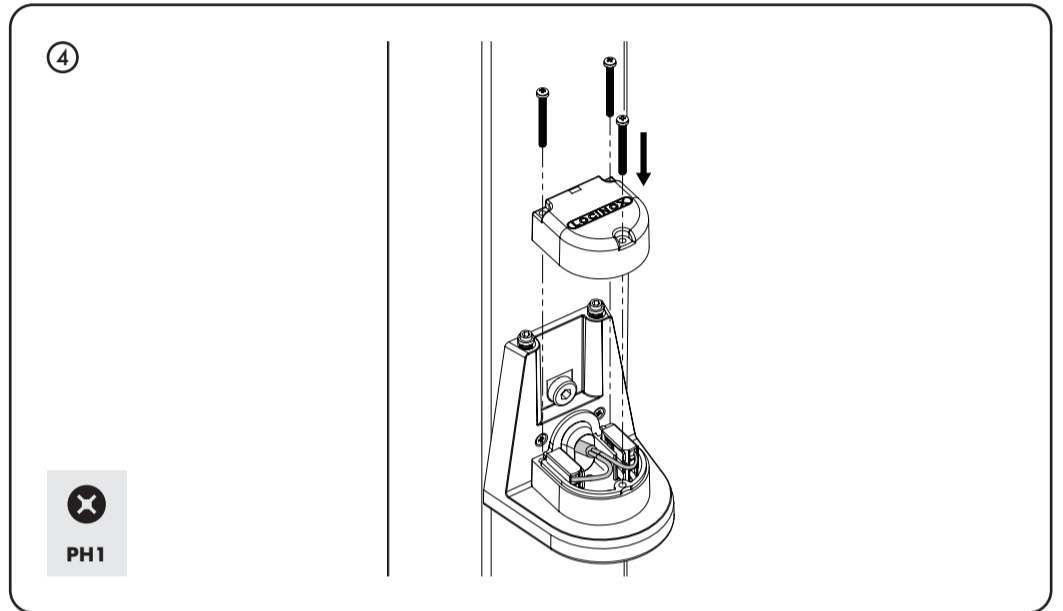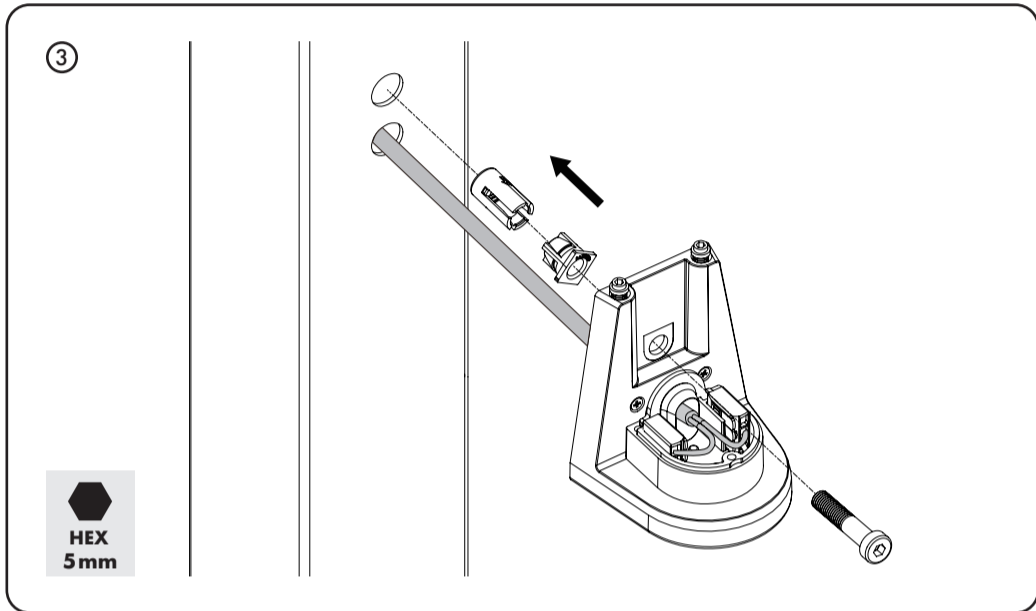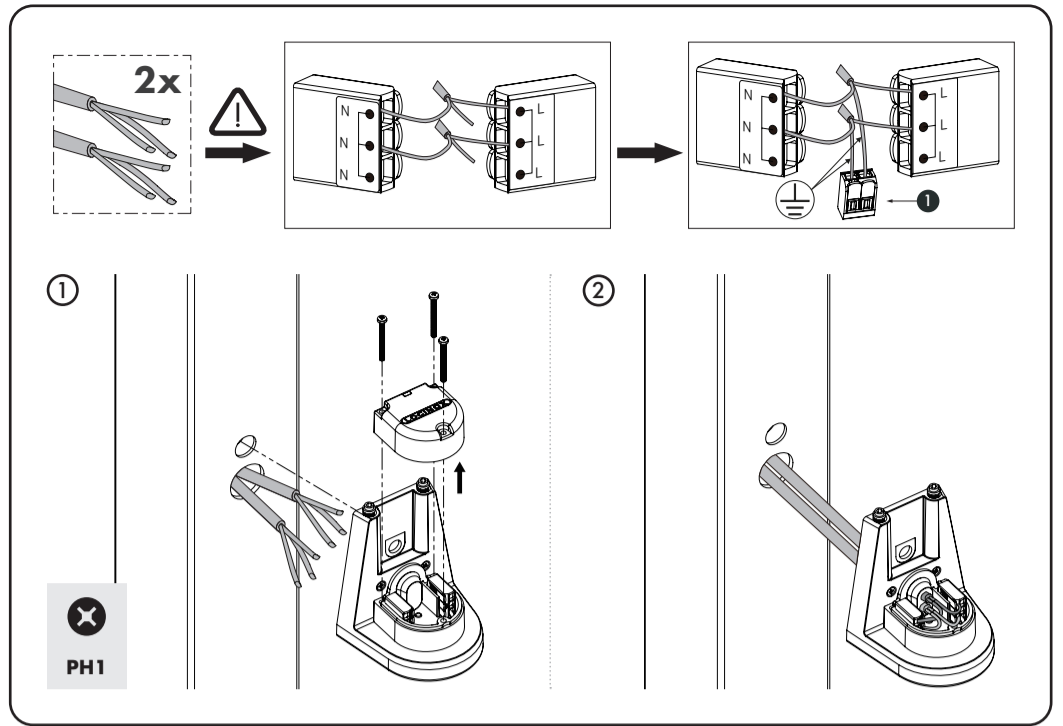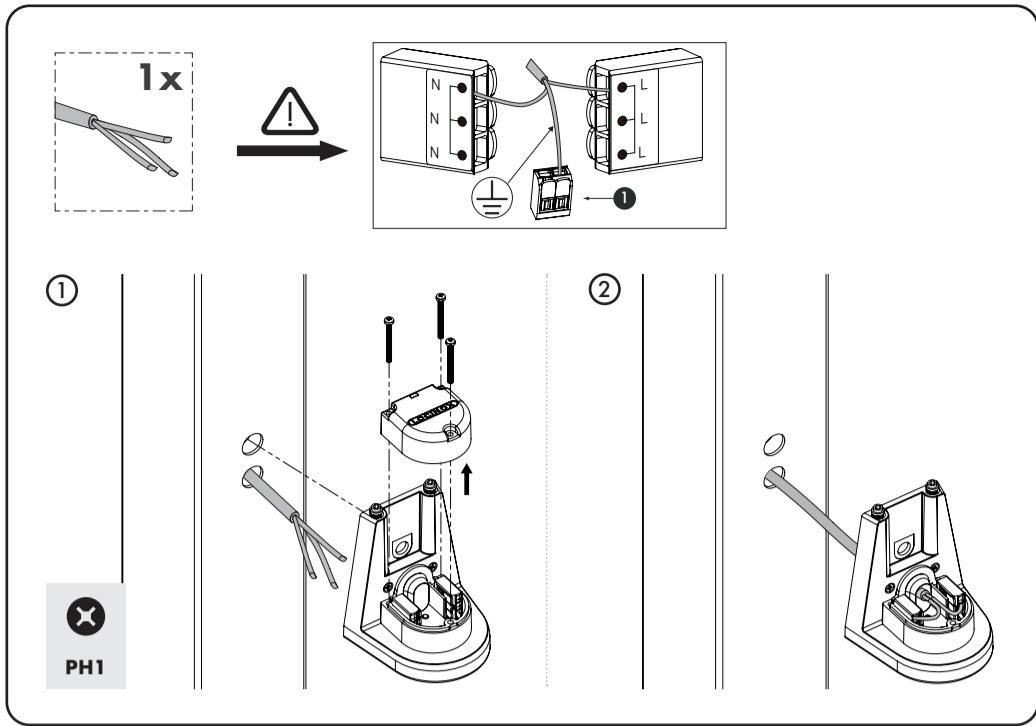

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Input voltage: 220-240V  
 Input current: 22mA  
 Power: Max.4.6W  
 Power factor: >0.85  
 Light output: 300LUMEN

Safety class II  
 Protection class IP65  
 Impact strength IK06  
 Colour temperature: 2700K  
 Maximum number of interconnected luminaires: 12pcs



Doc. Nr.: P00017263

Locinox NV • Brabantstraat 107 • 8790 Waregem • Belgium  
 Locinox CEE • Irysowa 9 • 55-040 Bielany Wrocławskie • Poland  
 Locinox LLC • 460 Windy Point Drive • Glendale Heights - IL 60139 • USA

